

MAXHUB



UC Pro 4K 60fps PTZ Camera with 12x Optical Zoom

**UNPRECEDENTED CLARITY
FOR A NEW GENERATION OF
VIDEO CONFERENCING.**

The MAXHUB 4K 60fps UC P20 is the next-generation of video conferencing equipment. This premium 4K UHD camera ensures crystal-clear video in any environment. 12x optical plus 16x digital zoom guarantees sensational clarity with smooth and ultra-silent PTZ. With versatile outputs and plug-and-play simplicity, the UC P20 sets new standards for mid-to-large meeting rooms.



4K 60fps Imaging System for Unprecedented Clarity

SONY 1/2.5-inch CMOS image sensor | 12x 4K optical zoom | Unmatched image sensor processor

- ▶ The superior 8.51 megapixel CMOS image sensor ensures excellent UHD video quality of up to 4K at 60fps. 12x optical zoom delivers clarity at any distance. Industry-leading ISP with 2D & 3D DNR boosts the quality of any video meeting.



Tilt $\pm 30^\circ$



HFOV 71°



Pan $\pm 170^\circ$

Ultra-silent PTZ Operation with Versatile Wide Viewing Angles

Tilt $\pm 30^\circ$ Pan $\pm 170^\circ$ | Whisper-silent motor | Up to 255 presets

- HFOV 71° viewing angles combined with smooth pan and tilt control puts every meeting in incredible focus. Whisper-silent motor allows users to adjust angles and zoom performance without pulling attention away from the conversation. Choose from up to 255 preset camera positions to instantly find the angle that's right for you.

MAXHUB




12x Optical Zoom & 16x Digital Zoom for Exceptional Image Quality Anywhere

12x optical zoom | 16x digital zoom

- > 12x optical zoom delivers sensational 4K resolution without compromising on clarity at any distance. 16x digital zoom provides more accurate close-ups. You can zoom up to 192 times, extending capture reach to as far as 200 metres.



12x optical zoom

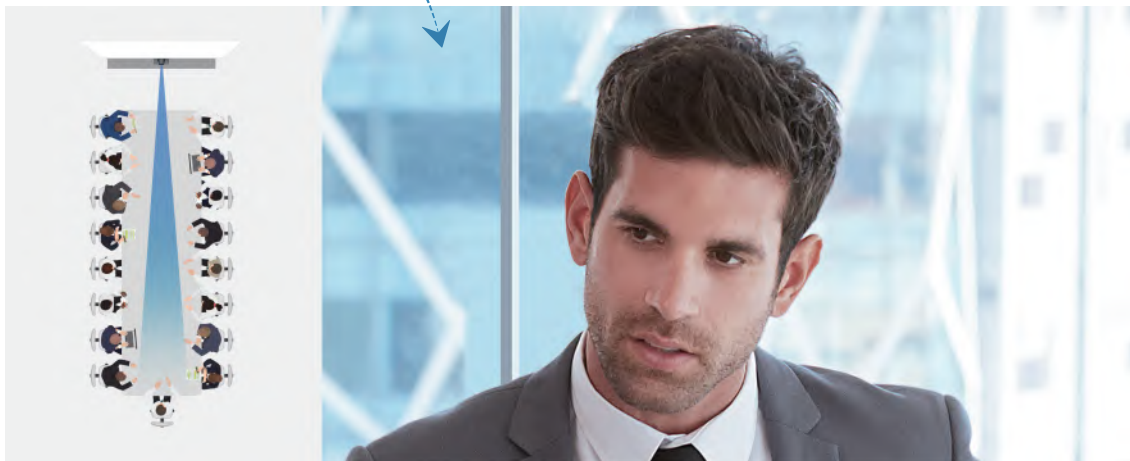



After 2D & 3D DNR

Before 2D & 3D DNR



After WDR

Before WDR

Unmatched ISP with 2D & 3D DNR Delivers Crisp, Clear Images

Unmatched image sensor processor | 1/2.5-inch CMOS image sensor | True WDR

- Premium ultra-low CMOS image sensors significantly reduce image noise, for crystal-clear pictures anywhere. Pioneering 2D and 3D DNR technology delivers unbeatable image quality even in low-light conditions. The result is a signal-noise ratio of $\geq 55\text{dB}$ and above.

Versatile Outputs for Plug-and-Play Simplicity

① RJ45 (support PoE) *1 ② HDMI 2.0 *1 ③ USB 3.0 *1

- Enjoy an easy set-up with plug-and-play functionality. Multiple ports including HDMI 2.0 and USB 3.0 deliver 4K at up to 60fps, so you can start conferences instantly. You'll be ready for any meeting in seconds, and the camera works with virtually any meetings application.



Pan, Tilt, Zoom, All Ready for Remote Access

IR remote | Support for RS232/RS485


- Pan, tilt and zoom to find the angle that suits you. A handy compact remote means that you can control your view with ease. RS232/RS485 ports enable quick connectivity with remote control software.



Meet However You Choose with Configurations to Suit You

PTZ wide viewing angle | Gravity sensor with auto image reverse

- Configure your meeting room to suit your needs. Install your camera as a wall, ceiling, or tabletop mounted device or choose a handy tripod. Built-in gravity sensors automatically correct your image orientation, and the UC P20 comes with the wall mounting hardware that you need to complete your meeting room.

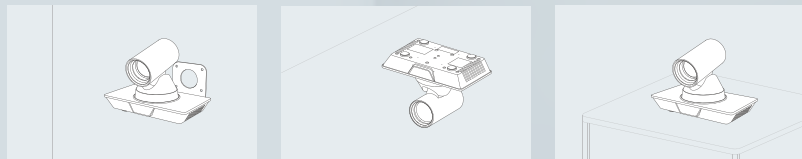

① Wall

② Ceiling

③ Tabletop



Specification

Camera	
VideoSystem	4K@60fps, 4K@50fps, 4K@30fps, 4K@25fps, 4K@59.94fps, 4K@29.97fps, 1080P@60fps, 1080P@50fps, 1080I@60fps, 1080I@50fps, 1080P@30fps, 1080P@25fps, 1080P@59.94fps, 1080I@59.94fps, 1080P@29.97fps, 720P@60fps, 720P@59.94fps
Sensor	1/2.5 inch, CMOS, Max Effective Pixel: 8.51M
Scanning Mode	Progressive
Lens	12x, f=4.4mm ~ 52.8mm, F1.8 ~ F2.6
Digital Zoom	16x
Minimum Illumination	0.5 Lux @ (F1.8, AGC ON)
Shutter	1/30s ~ 1/10000s
White Balance	Auto, Indoor, Outdoor, OnePush, Manual, VAR
Backlight Compensation	Supported
Digital Noise Reduction	2D & 3D Digital Noise Reduction
Signal Noise Ratio	≥55dB
Horizontal Angle of View	71° ~ 8.2°
Vertical Angle of View	42.7° ~ 4.5°
Horizontal Rotation Range	±170°
Vertical Rotation Range	±30°
Pan Speed Range	1.6°/s ~ 76°/s
Tilt Speed Range	0.5°/s ~ 15°/s
H & V Flip	Supported
Image Freeze	Supported
Number of Preset	255
Preset Accuracy	0.1°
UVC Features	
Operate System	Windows 7, Windows 8, Windows 10, MacOS X, Linux, Android
Encode Format	YUY2 / H.264 / H.265 / MJPEG

Video Format	YUY2: max to 1080P@30fps H.264 AVC: max to 2160P@60fps H.264 SVC: max to 2160P@60fps MJPEG: max to 2160P@30fps
USB Audio	Supported
USB Video Communication Protocol	UVC1.1~1.5
UVC PTZ	Supported
Network	
Video Compression	H.264 / H.265 / MJPEG
Video Stream	First Stream, Second Stream
First Stream Resolution	3840x2160, 1920x1080, 1280x720, 1024x576, 960x540, 640x480, 640x360
Second Stream Resolution	1280x720, 1024x576, 720x576(50Hz supported) , 720x480 (60Hz supported), 720x408, 640x360, 480x270, 320x240, 320x180
Video Bit Rate	32kbps ~ 51200kbps
Bit Rate Control	Variable Rate, Fixed Rate
Frame Rate	50Hz: 1fps ~ 50fps, 60Hz: 1fps ~ 60fps
Audio Compression	AAC
Audio Bit Rate	96Kbps, 128Kbps, 256Kbps
Protocols	TCP / IP, HTTP, RTSP, RTMP / RTMPS, ONVIF, DHCP, SRT, Multi-cast
Input & Output	
Network Interface	1×RJ45: 10/100/1000Mbps Adaptive Ethernet Port
Communication Interface	1×RS232 IN: 8pin Min DIN, Max Distance: 30m, Protocol: VISCA / Pelco-D / Pelco-P 1×RS485: 3pin phoenix port, Max Distance: 1200m, Protocol: VISCA / Pelco-D / Pelco-P

Specification

Audio Interface	1×LINEIN: 3.5mm Audio Interface
HDMI Interface	1×HDMI: Version 2.0
3G-SDI Interface	1×3G-SDI: BNC type, 800mVp-p, 75Ω.A long to SMPTE 424M standard
USB Interface	1×USB3.0: Up to 4K@60fps compressed video and 1080P original video can be output
Power Jack	JEITA type (DC IN 12V)

Power & Physical

Input Voltage	DC12V
Current Consumption	1.0A (Max)
Operating Temperature	-10°C ~ 40°C
Storage Temperature	-40°C ~ 60°C
Power Consumption	12W (Max)
Dimension	238mm×131.8mm×166.35mm
NetWeight	1.3kg

Statement

Size and weight may vary by configuration and manufacturing process, please refer to the actual product.
The product images are for illustrative purposes only and may slightly differ in appearance, color, size, etc. from the actual product.
The description, illustrations, etc. in the document may subject to change in accordance with the latest product specification and performance.
Should the above-mentioned change in the document become necessary, the document may be updated without written notice.



NOTICE: The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

MAXHUB

